



VIRAGE MAXI

AGRICULTURAL MACHINERY
sitrex[®]



**MIXER
FEEDERS**



Innovation and technology

Virage MAXI

200-220-240-270-300



STANDARD EQUIPMENT

2 Augers thickness 20 mm

Hydraulic action Augers COMER (variable 0-42 rpm)

CAN-BUS

Hydrostatic traction DANFOSS

Hydraulic motor DANFOSS

Miller 125 hp rotor 2000 mm with counter-beater rubber, belt 700mm and steel guide

Engine JOHN-DEERE 6 cylinders 6068HFC08 168Kw/225Hp - 2200rpm - 6800cc STAGE V

Weighing system PERIN 1500 with 4 load cells of \varnothing 70 mm

Front bilateral belt: rubber

Front-central belt: stainless steel bottom plus stainless steel chain

Cabin with ventilation and heating, adjustable seat and steering wheel, 360° visibility, door with sliding window with rack mechanism, front and side wipers, radio with "RDS", ergonomic controls


Working lights LED

Rear camera

Touch screen control panel

Heated rear mirrors

2 hydraulic counter-knives with electronic "Top Cut" control unit L. 900 mm

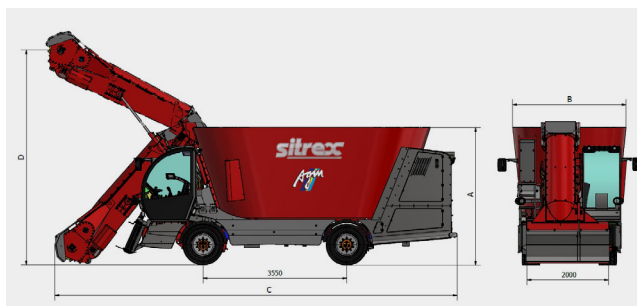

	MAXI VIRAGE 200	MAXI VIRAGE 220	MAXI VIRAGE 240	MAXI VIRAGE 270	MAXI VIRAGE 300
Weight	17.750 Kg	17.890 Kg	17.900 Kg	18.100 Kg	18.200 Kg
Capacity	20 m ³	22 m ³	24 m ³	27 m ³	30 m ³
Max load	8.500 Kg	9.200 Kg	10.000 Kg	10.500 Kg	11.000 Kg
Height (A)	3.010 mm	3.200 mm	3.350 mm	3.620 mm	3.620 mm
Width (B)	2.655 mm	2.655 mm	2.650 mm	2.650 mm	2.800 mm
Length (C)	9.400 mm	9.400 mm	9.445 mm	9.575 mm	9.575 mm
Work height cutter (D)	4300 mm	4315 mm	5300 mm	5730 mm	5750 mm
Front tyres	385/55 R22.5	385/55 R22.5	385/55 R22.5	385/55 R22.5	385/55 R22.5
Rear tyres	445/50 R22.5	445/50 R22.5	445/50 R22.5	445/50 R22.5	445/50 R22.5
Augers	2	2	2	2	2
Auger thickness	20 mm	20 mm	20 mm	20 mm	20 mm
Nr.of knives per auger	8+8	10+10	10+10	12+12	12+12
Tank bottom thickness	20 mm	20 mm	20 mm	20 mm	20 mm
Tank wall thickness	8 mm	8 mm	8 mm	8 mm	8 mm
Rear axle	Differential "CARRARO" self-locking - hydrostatic traction "DANFOSS"				
Weighing system	PERIN 1.500	PERIN 1.500	PERIN 1.500	PERIN 1.500	PERIN 1.500
Nr. of load cells	4	4	4	4	4



Trestina 06018 - Perugia Italy
 Phone +39(075)8540021 - Fax +39(075)8540523
 sitrex@sitrex.it - www.sitrex.com

Note: The above data may vary depending on the equipment