


3BM

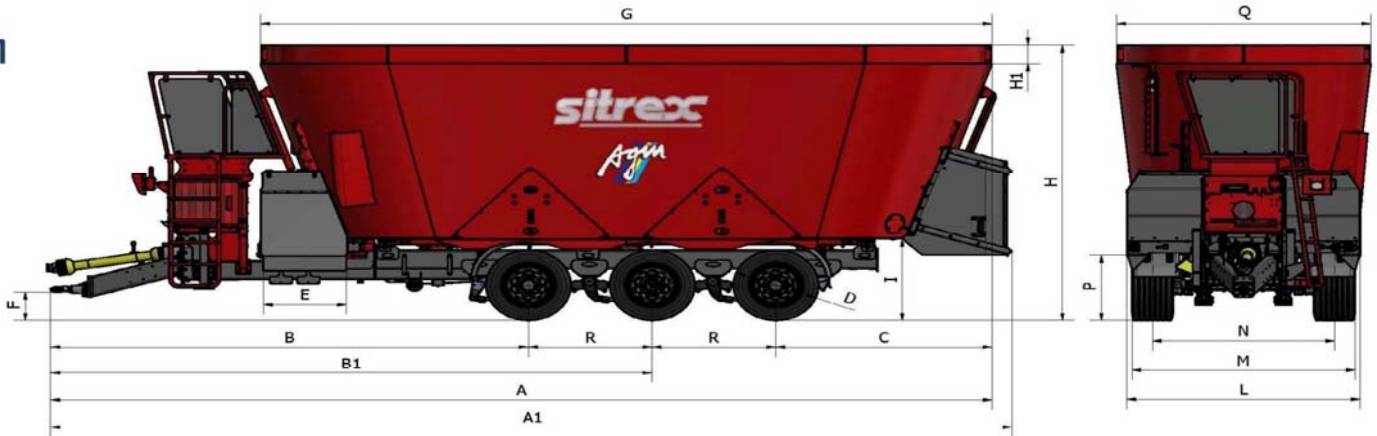

TECHNICAL DATA TRAILED MIXER FEEDER MODEL 3BM

	Modello Model	Portata Max Max Load Kg	Capacità Capacity m³	Potenza richiesta Power required HP/Kw	A	A1	B	B1	C	D	E	F	G	H	H1	I	L	M	N	P	Q	R	Pneumatici Tyres	Peso Weight Kg	
3BM	3BM - 300	12000	30	150 / 110	10250				2280				7780	3000	/										14800
	3BM - 350	14000	35	180 / 132	10250				2280				7870	3190	190										15200
	3BM - 400	16000	40	200 / 147	10350	10570	5250	6610	2380	930	920	380 500	8040	3440	/	1100	2550	2400	2000	870		1360	455/40 R22,5	15600	
	3BM - 450	18000	45	225 / 165	10350				2380				8040	3690	250										16000
	3BM - 500	20000	50	250 / 184	10350				2380				8040	3940	500										16500

ACCESSORIES STD AND OPT 3BM

- Cubature mc 35 / 40 / 45 / 50 (tank with removable band)
- STD N° 30 low power absorption auger knives
- OPT** maximum N° 39 auger knives with tungsten coating with low power absorption
- STD N°2 Hydraulic counter-blades L=900mm
- OPT** Containment ring
- STD Two speed Comer gearbox A-613R 540-1000 rpm with cable control
- OPT** Two speed Comer gearbox Powerschift with PTO a 1000 rpm
- STD Gearboxes Comer 2102 with 4 satellites (rpm auger PTO 540 = min 17 - max 31 - PTO 1000 = min 32 - max 57)
- OPT** Gearboxes Comer 2502 for heavy products and loads
 (rpm auger PTO 540 = min 15 -max 28 - PTO 1000 = min 28 - max 51)
- STD Platform and inspection ladder
- STD Perin 800 weighing system with n ° 6 sensors Ø70mm
- OPT** Graphic control unit and repeater display
- STD Front bilateral unloading mat in stainless steel, width 900mm
- OPT** Front bilateral unloading belt made of PVC 900mm wide with 350mm bilateral slide
- OPT** Right and left front doors front and rear
- STD Height adjustable drawbar with Scharmuller swivel spherical eye
- STD Bonnet designed for independent hydraulic system
- STD Hydraulic system for services with n ° 2 quick couplings and 4 services cable distributor
 (for tape-holder-counter-knives-feet)
- OPT** Electrical control for services
- STD Hydraulic system for axles with 2 quick couplings for straightening self-steering axles
- STD two hydraulic feet
- STD PTO schaft front class 10 Walterscheid 1 "3/4 Z20
- OPT** PTO schaft front homokinetic class 10 Walterscheid 1 "3/4 Z20
- STD N°6 Single wheels 455/40 R 22.5 radial 10 holes
- STD Axles kit with 10 stud bolts mod. ADR Tridem with front and rear axle self-steering without brakes and fixed central axle with
- OPT** Hydraulic steering control for front and rear axle
- STD Load-bearing frame with 6 weight sensors of 70
- STD Thickness 20mm bottom of the tank
- STD Tank wall thickness 8mm
- STD Auger thickness 15mm
- OPT** Auger thickness 20mm
- OPT** Rear view camera for reversing