
FLEX-WING FINISHING MOWERS - \$M 3600 4500 5200



- Sitrex Flex-Wing finishing mower is fitted with a tierod system that allows mower's oscillation during working while in transport position this tie-rod system automatically keeps the side mowers in vertical position.
- The adjustable hitch allows height adjustment to fit different types of tractors.
- Transport latching mechanism automatically engages when decks are raised into transport position. By simply pulling the release rope, the decks can be lowered into operating position



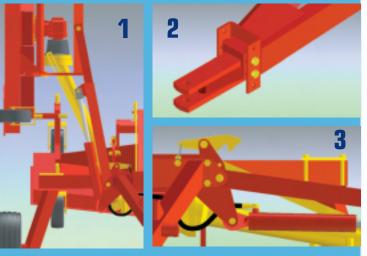

MULCHING KIT Available on request on all mower's models.

Made of additional conveyor and blades to triturate and spread without leaving grass drifting discharge on the ground.


- •Strong mainframe construction
- Independent deck flotation
- Blade spindles are greaseable
- Carrier wheels are large and heavy duty
- Heavy duty splitter gearbox
- Self-engaging transport locks
 Widths available: 12' 15' and 17'

SPECIFICATIONS		SM 3600	SM 4500	SM 5200
Overall cutting width	feet	12	15	17
Wing deck cutting width	feet	4	5	6
Center deck cutting width	inches	5	6	7,5
Deck overlap	inches	6	6	12
Overall width	inches	146	182	207
Transport width	inches	100	101	102
Maximum overall length	inches	182	185	196
Transport length	inches	177	180	188
Transport height	inches	90	100	110
Minimum horsepower requirements		30	35	40
Cutting height range	inches	1-5	1-5	1-5
Blade tip speed	FPM	16,000	16,000	16,000
Approximate weight	lbs	2600	2800	3100
Caster wheels		(12) 15x6.00-6		
Transport tires		(2) 26x12.00-12		





zona Industriale - Viale Grecia, 8
06018 TRESTINA (Perugia) - ITALY
Phone ++39 075 8540021 - Fax ++39 075 8540523
E-mail: sitrex@sitrex.it - http://www.sitrex.com

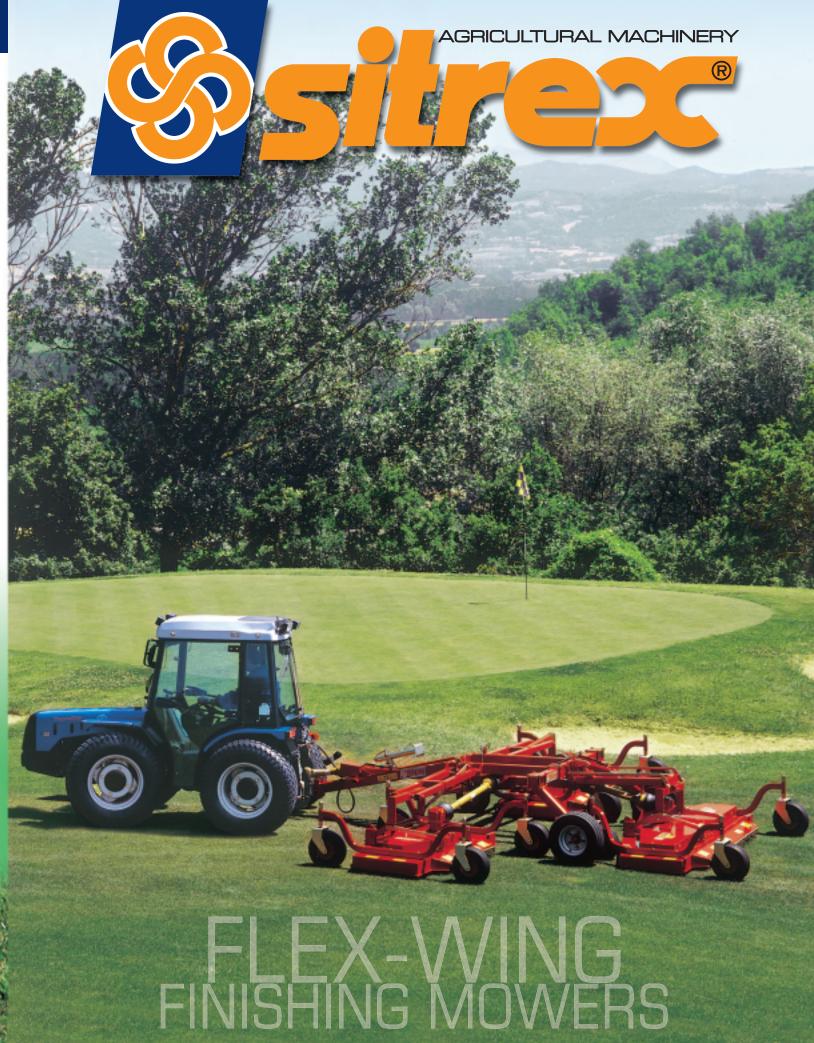

FLEX-WING FINISHING MOWERS - SM 3600 4500 5200

